

IMPORTED SOIL OR SOIL-FORMING MATERIALS PLACEMENT

Kirsten Foot and Danielle Sinnett

BPG

NOTE 5

Best Practice Guidance
for Land Regeneration

Introduction

Many sites in the UK have been left with little or no soil cover suitable for greenspace creation. This may be as a result of landfilling or mineral extraction or due to the presence of heavy industry. Soil material initially present on a site may have been removed or stored in bunds for long periods of time. Before successful vegetation establishment can take place, the soil cover will need to be replaced as part of the restoration of the site. This can involve either replacing the original soil that has been stored, importing a soil from elsewhere or using a soil-forming material. In all cases, the site developer must ensure that the soil cover placed on the site is suitable for plant growth. Often soil materials can hamper vegetation establishment because their chemical properties are not able to support plant growth (e.g. low nutrient or organic matter content) or because they have been stored or placed in such a way that their physical qualities are imperfect (e.g. shallow soil depth, compaction). To ensure that vegetation establishment will be successful, it is essential that soil materials are capable of supporting plant growth and that correct procedures for the placement of imported or stored soils and soil-forming materials are followed (Figure 1).

This BPG Note details advice and minimum standards acceptable by the Forestry Commission for the use and placement of imported soils or soil-forming materials on brownfield, landfill or otherwise disturbed sites. Forest Research is able to give advice and further guidance on all of the recommendations put forward here.

Guidelines for maintaining stockpiles

When soils are removed from a site and stockpiled, i.e. subjected to storage prior to use, the following guidelines should be implemented:

- Soils should not be stored if possible, but should be placed immediately on other parts of the site undergoing restoration.
- Care should be taken to ensure that topsoil and subsoil materials are kept separate at all times.
- If soil is stockpiled then storage mounds should be no higher than 1.5 m for topsoils or 3 m for subsoils.
- Stockpiles of different soil materials should be located at least 20 m apart from each other to prevent any inadvertent mixing of the materials.
- Storage mounds must not be located on top of reinstated soils or on areas where natural undisturbed soils are present.
- If soils are to be stockpiled for more than 6 months then mounds must be seeded with grass to prevent erosion and to reduce or eliminate the possibility of weed infestation.



Figure 1 Appropriate use of soil materials is essential in any reclamation project.

Standards required for soil materials

Table 1 presents Forestry Commission guidance on the minimum standards acceptable for soil-forming materials which are to be placed as part of a restoration process. BPG Note 2: *Laboratory analysis of soils and spoils* gives a more detailed overview of sample analysis.

Table 1 Minimum standards for soil-forming materials acceptable for woodland establishment (updated from Moffat and Bending, 1992; Dobson and Moffat, 1993; Bending *et al.*, 1999).

Parameter	Standard	Comments on method
Texture	No limitations; however, the placement location of materials of different texture on site should be related to site factors, e.g. topography	Texture (% sand, silt and clay) should be determined by pipette method. Preferred textures include materials with > 25% clay
Bulk density (after placement)	<1.5 g cm ⁻³ to at least 50 cm depth <1.7 g cm ⁻³ to below 1 m depth	
Stoniness	Clay or loam	Measure mass of stone >2 mm and >100 mm in a known mass / volume of soil; divide each value by 1.65 to calculate the volume
	Sand	
pH	Must be within the range 4.0 to 8.0	Based on a 1:2.5 soil: CaCl ₂ (0.01 M) suspension
Electrical conductivity	<0.2 S m ⁻¹	Based on a 1:1 soil:water suspension
Iron pyrite content	<0.05 %	British Standard 1016 method
Topsoil nutrient and organic content	N: 1000 kg N ha ⁻¹ (see note a) P: 16 mg l ⁻¹ (ADAS Index 2) K: 121 mg l ⁻¹ (ADAS Index 2) Mg: 51 mg l ⁻¹ (ADAS Index 1) Organic matter content: 10%	N determination using the Dumas method P and organic matter determination K and Mg determination
Specific metal and organic contaminants	These should, in the first instance, be assessed using appropriate generic assessment criteria (GAC), such as Soil Guideline Values (SGVs). Where no GAC are available, acceptable limits should be derived using a risk-based approach for human health	Determination according to substance using a method comparable with the GAC being used. Approval should be sought from Forest Research on the guideline concentrations being used before soil placement begins

^a Minimum standard is 1000 kg N ha⁻¹. The acceptable range is 1000–2000, with a recommended standard of 1500 kg N ha⁻¹. Does NOT apply in nitrate vulnerable zones (NVZ), where the limit is 250 kg N ha⁻¹ yr⁻¹; applications rates must be appropriate to the ecological benefit sought and determined on a site-by-site basis. Two years' worth of application may be applied in one year in an NVZ under licence. Whether inside or outside of an NVZ, add the *minimum* amount required to get sustained growth and do not exceed the maximum recommended soil C:N ratio of 20:1.

BPG Note 1 gives a more detailed overview of soil sampling and interpreting the data from sampling.

Soil materials that are suitable for woodland use can be readily identified by the following procedure:

1. Avoid the use of materials from sites known to contain contaminants, e.g. former heavy industrial or chemical engineering sites, or old landfill sites.
2. Visually inspect the materials at source and identify that they meet the initial specification for stoniness: avoid any with a high content of small stones or a total stone content in excess of 40% by volume. It is extremely difficult to remove small stones or improve excessively stony soils by mixing or de-stoning and stone content is often the key factor that causes the material to be rejected by the Forestry Commission.
3. Samples of soils for analysis should be representative of the bulk of the material. The soils must be tested for *all* of the chemical parameters listed in Table 1. A preliminary single set of analyses should be taken to indicate if the soil meets most or all of the standards listed in Table 1. If the material is suitable or borderline then at least two and preferably three sets of further analyses (conducted on different replicate samples) should be produced for each individual soil material, to give greater certainty about the nature of the material. When sending samples to the laboratory the type of source material should be stated (if known); this makes it easier to identify suitable products for mixing.

Sampling frequency

A minimum of six samples of material per stockpile or a minimum of three samples of soil from each horizon (topsoil, upper subsoil, lower subsoil) of placed material per hectare should be tested. If these samples show highly variable results, then further sampling may be required.

It is preferable to take samples of material before stockpiling or placement (if imported materials are used) to ensure that they meet the guidelines in Table 1. This will ensure that inappropriate materials are not imported onto a site which may hinder their use or adversely affect 'clean' materials which may be placed adjacent to them.

It should be made clear from the outset that any material which fails to meet these guidelines will not be accepted by the Forestry Commission for use on sites destined for a woodland end-use. Some flexibility is offered, however, in the ability to mix different soils of similar type in order to derive a material which will meet the standards listed above. The Forestry Commission works with the contractor in order to procure or produce good quality materials, and the following section gives guidelines on ways to achieve this.

Guidelines for mixing soil materials

Different types of soil may be mixed together in order to produce a suitable end-material. For example a lime-rich or high pH soil may be mixed in moderate quantities with a more neutral one (pH 6 or 7) to obtain a suitable end-material. Mixing is feasible if the textural classes of the two soils are adjacent on the textural triangle shown in Figure 2. However, soil has many different constituents with different properties that may interact in different ways. It is therefore important that advice is sought before mixing products, to make the best use of the materials available following receipt of laboratory analyses.

Soils which might possibly be mixed will include materials which:

- meet at least 90% of the standards listed above but are borderline on one or two standards;
- fall just outside the pH ranges indicated.

However, the composite properties of the final mixed materials must meet the standards listed in Table 1. If the samples are not suitable for mixing with other available materials then they should not be used. Sample mixing tests can be undertaken by a qualified authority to check that the final product is suitable for use on site. Advice on types of organic amendments which can be mixed in with the soil materials to produce a more suitable end-product should also be sought.

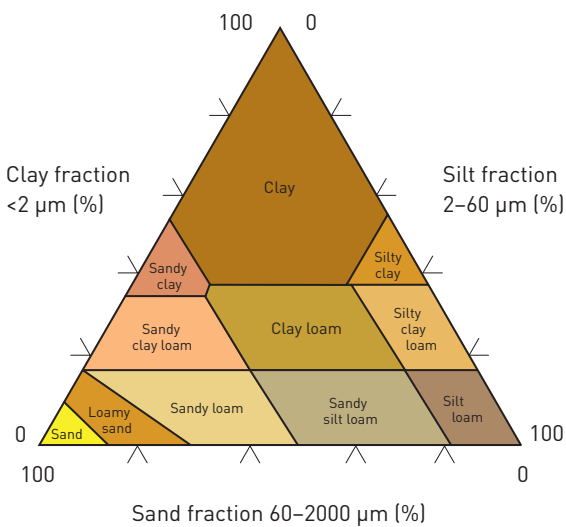


Figure 2 Soil textural triangle.

Guidelines for placing soil materials

The following guidelines focus on care and constraints in the use of soil materials.

- It is easiest to design a tree planting scheme if materials of similar type are constrained to particular locations on site. For example, try to avoid tipping soils of markedly different textures next to each other in a random mix (it is particularly important not to mix sands with clays).
- Materials containing a high proportion of fine sand or silt should be placed only on flat areas, to ensure that the risk of surface erosion is minimised. Clays are more suitable for slopes. Advice on the placement location that is best for the different materials should also be sought.
- Soils should be placed in the correct sequence, subsoils first and then topsoils.
- The locations of different types of placed materials from each source or mix should be drawn onto a site map so that the extent and boundaries are well defined for both topsoil and subsoil materials. The placed depth of each soil layer should also be recorded. This ensures that the planted tree species are suited to the different soil conditions present and that any further drainage or cultivation needs can be easily identified.
- Extreme care should be taken if placing soils near to watercourses or open ditches to prevent soil or sediment entering the watercourse. It is normally recommended that a buffer strip of at least 5 to 10 m should be maintained between an open ditch and the first tipped soil mound, but approval should be sought from the Environment Agency or SEPA before proceeding with such works. The land contour alongside the ditch should be graded using the backactor to a shallow slope of no more than 5% to reduce the risk of surface erosion or slumping of the placed materials. Where main watercourses are present or where arterial ditches are present which flow directly into a main watercourse, runoff from the reinstated soil must be collected and passed into settlement lagoons to prevent the pollution of watercourses by eroded material.
- Care must be taken to avoid soil losses or contamination with other materials at all times.
- Care should also be taken to minimise nuisance from dust at all times.
- Further information on appropriate soil placement can be found in BPG Note 4: *Loose tipping*.

Depth of placed final soil cover

The depth of soil required for woodland on landfill sites is determined by the need:

- To prevent penetration (and/or desiccation) of any mineral cap present (e.g. on landfill sites) by tree roots.
- To provide sufficient available soil moisture and nutrition to support and sustain healthy, mature trees.
- To provide anchorage for roots and to avoid windthrow.

The general minimum guideline depth for soil cover over landfill sites where the end-use is woodland is 1.5 m of *rootable* placed soil cover (Dobson and Moffat, 1993). This value should reflect the final rootable depth following any settlement of the soil. Rootable implies that the soil must be free from compaction. This depth requirement must be reviewed in areas of low rainfall and according to the nature of the soil cover.

A greater depth of placed final cover is required for soils of sandy or chalky texture and of moderate stone content due to their reduced water holding capacity. Soils with stone content above 40% by volume should not be used.

The guidelines for soil depth assume that the soil profile is composed predominantly of subsoil with a topsoil cover of 0.3 m depth. Topsoil cover is recommended for all soils but is not essential for those with a moderate to high clay content. Topsoil will, however, be required over nutrient-poor or unstable / erodible subsoil materials. The recommended soil depths are based upon the assumption that the material to be used as placed soil cover is 'clean' and free from contamination and meets the specification given in Table 1.

References and further reading

- Bending, N.A.D., McRae, S.G. and Moffat, A.J. (1999). *Soil-forming materials: their use in land reclamation*. The Stationery Office, London.
- Department of the Environment (1986). *Waste Management Paper No. 26*. HMSO, London.
- Department for Environment, Food and Rural Affairs (DEFRA) and Environment Agency (EA). (2002). *Soil Guideline Values reports for individual soil contaminants*. Report CLR 10 SGV 1-10. Environment Agency, Bristol.
- Dobson, M. and Moffat, A.J. (1993). *The potential for woodland establishment on landfill sites*. HMSO, London.
- Doick, K.J. and Ashwood, F. (2011). *Brownfield regeneration to a soft-end use: Barriers to using a quality planting medium. Reclamation*. British Land Reclamation Society.
- Moffat, A.J. (1995). Minimum soil depths for the establishment of woodland on disturbed ground. *Arboricultural Journal* 19, 19–27.
- Moffat, A.J. and Bending, N.A.D. (1992). *Physical site evaluation for community woodland establishment*. Forestry Commission Research Information Note 216. Forestry Commission, Edinburgh.
- Moffat, A.J. and McNeill, J. (1994). *Reclaiming disturbed land for forestry*. Forestry Commission Bulletin 110. HMSO, London